

Pearl Mantels, Inc.

PERFECTION CAST STONE



Offering beautiful, cast stone mantel shelves. Artisan Todd Evans crafts each shelf from custom made molds designed to emulate the elegant variations, colors, and imperfections admired in natural stone.

**Shelves are available in 5 foot and 6 foot lengths, in a variety of colors
For use indoors and outdoors:**



Leather Safari Smoke Natural

Installation is done following a 3 step plan. It is recommended that 2 people be available for installation.

Note: We suggest consulting a local expert if you are unfamiliar with masonry assembly and installation.

Masonry installation: Install corbels onto the masonry by attaching the brackets with 3/8" x 4" lag screws using suitable anchors. You will need 2 per corbel. For even weight distribution of the shelf, mount corbels approximately 12" in from each end on the 5 ft. shelf and 18" on the 6ft. shelf. After corbels are installed apply mortar or construction adhesive, per manufacturer's product instructions, to the top of each corbel and to the back of the shelf. Set mantel on top of corbels, arrange so that it is centered on the corbels and press against the wall. If necessary, clean with a slightly dampened cloth. Commercial cleaning products are not recommended.


If this is new construction, the stone will go over the brackets keeping them out of sight.

If this is a retrofit, use any stone parts that were chipped out in order for the shelf to fit to hide the brackets.

If installing to drywall, it will be necessary to cut the drywall away and install additional blocking between the studs to support the weight of the corbels and shelf. Hide the corbel brackets when reinstalling the drywall or hide with whatever material you may be using over the drywall (i.e. stone veneer, tile, etc.)

Please consult a professional if necessary.

3 - Step Installation:

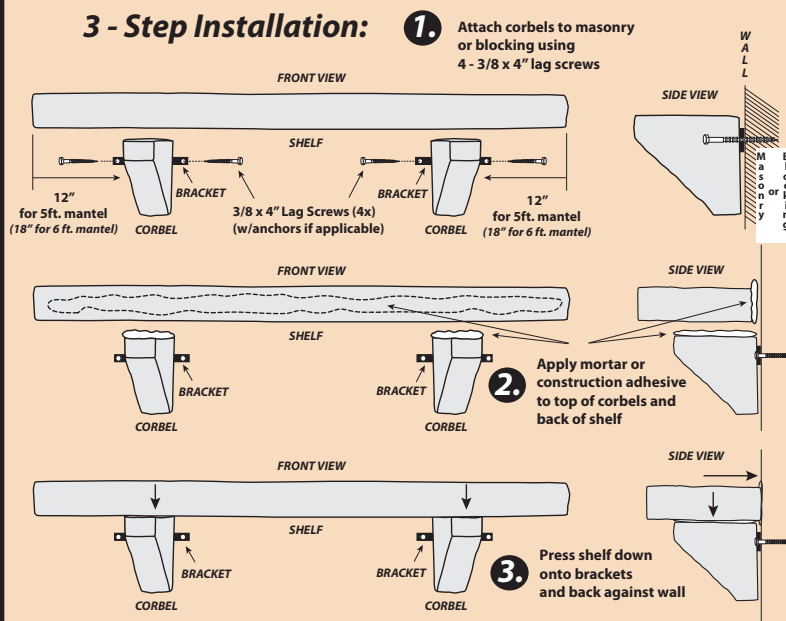

Sizes of Mantel and Brackets

5 foot Mantel: 5' x 12" x 4" weighs 97 lbs.

6 foot Mantel: 6' x 12" x 4" weighs 116 lbs.

Brackets: 9" x 9" x 4" weigh 14 lbs. each

Shelf will bear weight of 100 lbs. over each corbel, evenly distributed

Because each piece is individually hand crafted and poured, measurements may vary up to 1/2" and we recommend that the mantel shelf and corbels be installed first, then install the stone around the shelf. This insures a secure fit for the mantel and brackets. If there are any gaps, they should be filled with mortar joint.

PERFECTION CAST STONE PRODUCTS

Made for **Pearl Mantels, Inc.**

P.O. Box 1688

Collierville, TN 38027

901.853.8237 Fax 901.861.1057

www.pearlmanets.com

pearl@pearlmanets.com